DRAFT SURVEY REPORT

CERT Nº 2246-1310-2026



MV Laura
GRT: 36,295
NRT: 21,588



AGROPECUARIO EL SURCO S.A.



Caldera - Costa Rica, October 19, 2026

11 M
8
6
4
2
10 M



www.mslogisticsgroup

Caldera - Costa Rica, October 19, 2026

DRAFT SURVEY REPORT

1. INTRODUCTION

1.1. PURPOSE

We MSL Marine Surveyors and Logistics, as independent supervision company, were appointed to carry out a Draft survey of 51442 mt of SOYA BEANS-DDGS-YELLOW CORN aboard of **M/V "MV LAURA"** at Puerto Caldera – Costa Rica.

1.2. INSTRUCTIONS

1.2.1. Survey requested by: AGROPECUARIO EL SURCO S.A.

1.2.2. On behalf of: AGROPECUARIO EL SURCO S.A.

1.3. REPRESENTATIVES

1.3.1. Master of the ship: PANGATUNGAN, WILMER ABING

1.3.2. Chief Officer: AURO, MELVIN GEÑORGA

2. VESSEL PARTICULARS

2.1.	Name	MV "MV LAURA"
2.2.	Port Of Registry / Flag	MONROVIA / LIBERIA.
2.3.	GRT / NET	36,295/ 21,588
2.4.	Year Built	2015
2.5.	IMO Number	9700665.

3. EXTRACT TIME SHEET

3.1.	Vessel Arrived at Sea buoy	Oct 03 2026 06:30 LT.
3.2.	N.O.R Tendered	Oct 03 2026 06:30 LT.
3.3.	All Fast	Oct 13 2026 18:48 LT.
3.4.	Initial Draft Survey	Oct 13 2026 20:00 LT.
3.5.	Commenced Discharge	Oct 13 2026 22:35 LT.
3.6.	Completed Discharge	Oct 19 2026 11:00 LT.
3.7.	Final Draft Survey	Oct 19 2026 11:40 LT.

4. THE GOODS

51442 metric tons of Grains in bulk (SOYA BEANS-DDGS-YELLOW CORN) Loaded in holds 1-2-3-4-5.

WEIGTH CONTROL

4.1. The weight was supervised by one method: By Draft Survey.

4.1.1. By Draft Survey, the weight was calculated by the MSL Surveyors, according to the International Draft Survey Procedures (See Amended Draft Survey Certificate).

4.2. The reliability of the method depend of the calibration degree in the vessel's Hydrostatic / Ballast tables and Calibration.

5. CARGO QUANTITY DISCHARGED BY DRAFT SURVEY

5.1. The Initial and Final Draft Survey were accomplished in joint with the Chief Officer. For the Draft Survey calculations were used the vessel's Hydrostatic Tables.


TOTAL DISCHARGED BY DRAFT SURVEY (BY MSL SURVEYOR)

Draft Survey Figure	51444,60	MT.
B/L Figures	51442	MT.
Difference	**2.60**	**MT**
Percentage	**0.0051**	**%**

TOTAL DISCHARGED BY SHORE SCALE AS A REFERENCE (BY SPC CALDERA)

Shore Scale Figures	51231,90	MT.
B/L Figures	51442	MT.
Difference	**210.10**	**MT**
Percentage	**0.4084**	**%**

THIS BONAFIDE REPORT IS ISSUED WITHOUT PREJUDICE AND IS FOR THE BENEFIT OF WHOM IT MAY CONCERN, AND WE RESERVE OUR RIGHT TO AMEND AND/OR EXTEND THIS REPORT SHOULD NEW INFORMATION COME TO OUR KNOWLEDGE

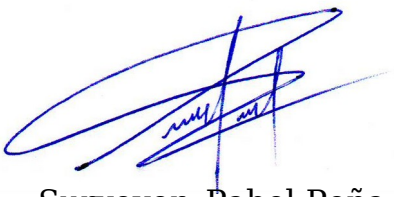

Surveyor. Pabel Peña
Marine Master Surveyor.
MSL Marine Surveyors and Logistics Group.

6. ENCLOSURES

6.1. Draft Survey Certificate

Marine Surveyors and Logistics

Draft Surveys - Cargo Inspection - Bunker Surveys
On/Off Hire Surveys - Petroleum Q&Q
Container & Cargo Damage

INITIAL SURVEY			MV LAURA		FINAL SURVEY	
DATE	13/10/2026	CARGO	SOYA BEANS-DDGS-YELLOW CORN		DATE	19/10/2026
FROM	20:00	FROM	MISSISSIPI RIVER	LOADING	FROM	11:00
TO	21:00	TO	UERTO CALDERA - COSTA RIC	UNLOADING	TO	11:40

INITIAL DRAFT SURVEY

PORT	STB	MEAN	Crrn.	TRUE	Marks
11.7500	11.5500	11.6500	-0.0020	**11.6480**	4.78
12.1000	11.4900	11.7950	-0.0004	**11.7946**	0.89
11.9000	11.5500	11.7250	0.0047	**11.7297**	11.08

A.Trim	T.Trim	S.G.	LPP	MMM
0.0750	0.0817	1.0180	194.50	**11.7501754**

LCF	TPC	MTC+50	MTC-50	TPC - P	TPC - S
2.58	61.88	949.60	934.35		

FINAL DRAFT SURVEY

PORT	STB	MEAN	Crrn.	TRUE	Marks
4.4900	4.5900	4.5400	-0.0677	**4.4723**	4.78
5.7400	5.8400	5.7900	-0.0126	**5.7774**	0.89
7.2000	7.2000	7.2000	0.0255	**7.2255**	1.80

A.Trim	T.Trim	S.G.	LPP	MMM
2.6600	2.7531	1.0180	194.50	**5.7772788**

LCF	TPC	MTC+50	MTC-50	TPC - P	TPC - S
-6.74	55.82	711.90	678.13		

BALLAST	270.60	65,557.39		DISPLACEMENT	30,123.41	BALLAST	16,081.68
F.WATER	185.00		N	DECIMAL CORRECTION		F.WATER	185.00
FUEL OIL	760.55	65,557.39		DRAFT DISPLACEMENT	30,123.41	FUEL OIL	738.40
DIESEL OIL	168.16	6.70		TRIM CORRECTION "A"	-532.37	DIESEL OIL	161.78
LUB OIL		0.03		TRIM CORRECTION "B"	65.81	LUB OIL	
SLOP	-	6.72		TOTAL TRIM CORRECTIONS	-466.56	SLOP	-
S, POOL	-			LIST CORRECTION		S, POOL	-
OTHERS		65,564.11		CORRECTED DISPLACEMENT	29,656.84	OTHERS	
DEDUCTIONS	1,384.31	**-447.75**		**DENSITY CORRECTION**	**-202.53**	DEDUCTIONS	17,166.86
		65,116.35		TRUE DISPLACEMENT	29,454.31		
		1,384.31		TOTAL DEDUCTIONS	17,166.86		
		11,819.00		LIGHT SHIP	**11,819.00**		
		378.00		HISTORIC CONSTANT			
				CONSTANT "K"	468.44		
		63,732.04		INITIAL NET LIGHT DISPLACEMENT	63,732.04		
				FINAL NET LIGHT DISPLACEMENT	12,287.44		
		51,535.04	INIT FIGURE	SURVEY FIGURE	**51,444.60**		
		51,442.00		B/L FIGURE	51,442.00		
		93.04		DIFFERENCE	2.60		

CONDITIONS	GOOD	REG	BAD
SOUNDING PIPES	X		
DRAFT MARKS	X		
SWELL INITIAL		X	
SWELL FINAL		X	
HYDROSTATIC TB.	X		
DISTANCE TO MARKS	X		
BALLAST TABLES	X		

AURO, MELVIN ARGEÑORGA
CHIEF OFFICER

PANGATUNGAN, WILMER ABING
MASTER

MANFRED BOLAÑOS
MSL SURVEYOR

Head Office – Alajuela, Oficentro Plaza Aeropuerto - Office G14 - Phone (506) 8814-07-84 – Tele (506) 4037-5903
www.mslogisticsgroup.com

REMARK: Swell Condition, Initial (0,10 to 0.20 Mtr) / Final Draft (0,10 to 0,20 Mtr)

U.N. , ECE - DRAUGHT SURVEY CODE

DRAUGHT SURVEY REPORT OF CARGO IN BULK	[ ] LOADED [X] UNLOADED	FORM "E"

Corporate identification:

MSL Marine Surveyors And Logistics

Vessel M/V : MV LAURA

Survey no: 2246-1310-2026

CARGO STATEMENT

	Metric Tonnes
Starting Displacement Corrected	63,732.04
Finishing Displacement Corrected	12,287.44
Difference in Displacement = TOTAL CARGO IN BULK IS:	51,444.60

OBSERVATIONS: Shore scale quantity (if available) M.T.

Note on any unusual situatonts, exception/s from required Uniform Code standard, specific identification (source, drawing no., date, title. certifying authority) of each ships document used in translating recorded measurements Irvto weights and, when applicable, reasons for surveyors refusal or impossibility to perform the survey:

	Metric Tonnes
Corrected light displacement =	65,116.35
Deductables =	1,384.31
Lightship =	11,819.00
Constant =	468.44
Mean of previous constants =	

I certify that the constant calculated from this draught survey has been entered into the ship's 'Constant Certificate'

In my judgement the weather conditions, the sea conditions, and the conditions of the ship at the times the draught surveys were conducted, were within acceptable limits and did not adversely affect the accuracy of this survey. This Bona Fide report consisting of 4 pages, including this page, all duly initialled or signed is issued without prejudice and is for the benefit of whom It may concern.

Marine Surveyors and Logistics MSL - Inspection - Control - Costa Rica

Name at surveying firm

By Manfred Bolaños
(Signature of Surveyor/s)

MSL Marine Surveyors And Logistics

Name/s in print PANGATUNGAN, WILMER ABING - AURO, MELVIN GEÑORGA - MANFRED BOLAÑOS

I have participated in all stages of this draught survey, and agree with the results obtained. I acknowledge receipt of the ship's copy.

Signed:	Rank:	Name in print:
	MASTER	PANGATUNGAN, WILMER ABING
	CHIEF OFFICER	AURO, MELVIN GEÑORGA

MV LAURA LIBERIA

U.N. , ECE - DRAUGHT SURVEY CODE

DRAUGHT SURVEY REPORT OF CARGO IN BULK	[ ] LOADED [X] UNLOADED	FORM "D1"


Corporate identification: MSL Marine Surveyors And Logistics

Vessel M/V : MV LAURA

Survey no: 2246-1310-2026

STARTING SOUNDING: From Hours: 20:00 | To Hours 21:00 | Date: 13/10/2026 | Trim: 0,082 M

Compartment Title. * Tank no. * Bilges * Duct Keel	Maximun height meausured (*) metres	Sounding / ullage metres	Sounding / ullage corrected for trim / list metres	Volume corrected for trim / list m3	Density of Water in air Kg/m3	Total weight Metric tonnes
A - BALLAST						
FPT	-	0,09		3,60	1,0160	3,66
WBT 1P	-	EMPTY		9,50	1,0160	9,65
WBT 1S	-	EMPTY		1,90	1,0160	1,93
WBT 2P	-	EMPTY		7,30	1,0160	7,42
WBT 2S	-	EMPTY		16,40	1,0160	16,66
WBT 3P	-	EMPTY		17,40	1,0160	17,68
WBT 3S	-	EMPTY		11,00	1,0160	11,18
WBT 4P	-	EMPTY		17,40	1,0160	17,68
WBT 4S	-	EMPTY		16,90	1,0160	17,17
WBT 5P	-	EMPTY		1,82	1,0160	1,85
WBT 5S	-	EMPTY		1,80	1,0160	1,83
APT	-	1,73		159,90	1,0250	163,90
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
Total A						**270,60**
B - FRESH WATER						
FWT P	-	GAUGE		100,00	1,0000	100,00
FWT S	-	GAUGE		85,00	1,0000	85,00
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
Total B						**185,00**



U.N. , ECE - DRAUGHT SURVEY CODE

DRAUGHT SURVEY REPORT OF CARGO IN BULK | [ ] LOADED [X] UNLOADED | **FORM "D2"**

Corporate identification: MSL Marine Surveyors And Logistics

Vessel M/V : MV LAURA

Survey no: 2246-1310-2026

FINISHING SOUNDING: From Hours: 11:00 | To Hours 11:40 | Date: 19/10/2026 | Trim: 2.753 M

Compartment Title. * Tank no. * Bilges * Duct Keel	Maximun height meausured (*) metres	Sounding / ullage metres	Sounding / ullage corrected for trim / list metres	Volume corrected for trim / list m3	Density of Water in air Kg/m3	Total weight Metric tonnes
A - BALLAST						
FPT	-	8,61		1 196,80	1,0180	1 218,34
WBT 1P	-	18,17		1 125,60	1,0180	1 145,86
WBT 1S	-	18,60		1 543,20	1,0180	1 570,98
WBT 2P	-	16,33		1 252,21	1,0180	1 274,75
WBT 2S	-	18,19		1 560,60	1,0180	1 588,69
WBT 3P	-	18,72		1 750,23	1,0180	1 781,73
WBT 3S	-	18,50		1 769,40	1,0180	1 801,25
WBT 4P	-	6,10		1 120,90	1,0180	1 141,08
WBT 4S	-	5,79		1 120,56	1,0180	1 140,73
WBT 5P	-	8,31		1 123,33	1,0180	1 143,55
WBT 5S	-	7,49		1 098,40	1,0180	1 118,17
APT	-	9,97		1 136,10	1,0180	1 156,55
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
Total A						**16 081,68**
B - FRESH WATER						
FWT P	-	GAUGE		100,00	1,0000	100,00
FWT S	-	GAUGE		85,00	1,0000	85,00
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
	-	-		-	-	-
Total B						**185,00**

